


# ENHANCED SERVICE LIFE

DEVELOPED TO PROVIDE EXTENDED SERVICE LIFE, WITH NO SACRIFICE TO IT'S PROVEN DRILLING PERFORMANCE.

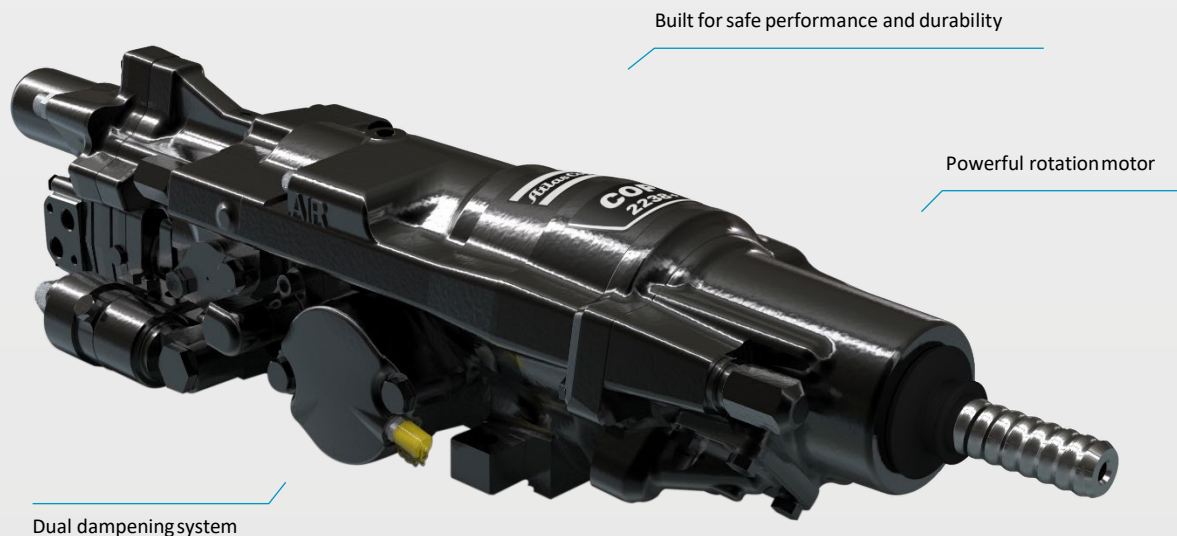

Built for safe performance and durability

Powerful rotation motor

Dual dampening system

## DRIFTER COP2238+

Specially created for construction

### + MAIN BENEFITS

**High torque output** for efficient drilling minimizing the risk of jamming

**Reliability** with optimized rock contact, while simultaneously protecting the rock drill from harmful energy recoils

**Sustainability** by ensuring cuttings are removed efficiently to promote better bit life



The low profile opermits drilling close to walls with only 2 degrees of lookout angle.



Service tools are available to facilitate precise and correct machine maintenance kits are available for maintenance ease, and ensuring equipment safety and performance.



Major and minor preventative maintenance to ensure optimized rock drill service life.

**DIMENSIONS AND WEIGHT**

	COP 1638+	COP 1838+	COP 2238+
Weight	173 kg (381 lb)	170 kg (375 lb)	174 kg (386 lb)
Length without shank adapter	1008 mm (3 ft 3.6 inch)	1008 mm (3 ft 3.6 inch)	1008 mm (3 ft 3.6 inch)
Width including connectors	251 mm (9.9 inch)	251 mm (9.9 inch)	251 mm (9.9 inch)
Height	223 mm (8.8 inch)	223 mm (8.8 inch)	223 mm (8.8 inch)
Height over drill center	88 mm (3.5 inch)	88 mm (3.5 inch)	88 mm (3.5 inch)

**IMPACT RATINGS**

	COP 1638+	COP 1838+	COP 2238+
Impact power (maximum)	16 kW (21.4 hp)	18 kW (24 hp)	22 kW (29.5 hp)
Input power to rock drill (maximum)	26 kW (34.8 hp)	31 kW (41.6 hp)	38 kW (51 hp)
Hydraulic pressure (maximum)	200 bar (2900 psi)	230 bar (3336 psi)	250 bar (3626 psi)
Flow rate	60 - 77 l/min (2 - 2.7 cfm)	75 - 92 l/min (2.6 - 3.2 cfm)	83 - 93 l/min (2.9 - 3.3 cfm)
Impact frequency	60 Hz	60 Hz	73 Hz

**ROTATION MOTORS**

	COP 1638+/COP 1838+/COP 2238+			
Type	02 (80 cc)	05 (100 cc)	06 (125 cc)	07 (160 cc)
Rotation range	0 - 370 rpm	0 - 340 rpm	0 - 275 rpm	0 - 215 rpm
Torque (maximum)	440 Nm (324.5 lbf-ft)	640 Nm (472 lbf-ft)	820 Nm (605 lbf-ft)	1000 Nm (737 lbf-ft)
Working pressure (maximum)	210 bar (3046 psi)	210 bar (3046 psi)	210 bar (3046 psi)	210 bar (3046 psi)
Oil consumption	75 l/min (2.6 cfm)	75 l/min (2.6 cfm)	75 l/min (2.6 cfm)	75 l/min (2.6 cfm)

**FLUSHING FLOW AND PRESSURE**

	COP 1638+	COP 1838+	COP 2238+
Flushing water pressure (maximum)	25 bar (362.6 psi)	25 bar (362.6 psi)	25 bar (362.6 psi)
Lubricating air consumption at 2 bar (29 psi)	5 l/s (10.6 cfm)	5 l/s (10.6 cfm)	5 l/s (10.6 cfm)
Flushing water consumption*	35 - 120 l/min (1.2 - 4.3 cfm)	40 - 120 l/min (1.4 - 4.3 cfm)	50 - 120 l/min (1.8 - 4.3 cfm)

\* Flushing water consumption depends strongly upon hole diameter, bit type, drill rod size and rock hardness.  
The figures above are typical values for spherical button bits in granite 200 Mpa (36,250 psi)

**SERVICE KITS**

	COP 1638+	COP 1838+ (Guide diameter 38)	COP 1838+ (Guide diameter 52)	COP 2238+
Seal kit	3115 9170 95	3115 9170 92	3115 9170 92	3115 9170 96
Minor Preventive Maintenance kit	3115 9241 92	3115 9238 95	3115 9238 95	3115 9241 94
Major Preventive Maintenance kit	3115 9241 93	3115 9238 96	3115 9238 97	3115 9241 95

**SHANK ADAPTERS**

	COP 1638+/COP 1838+/COP 2238+		
	Drifting	Long-Hole/Extension drilling	Ø of shank
R32	403 - 09101,10	403 - 09103,10	ø38
R32	N/A	403 - 09103 - 18,10	ø52
TC35	N/A	469 - 09103 - 18,10	ø52
R38	404 - 09101,10	404 - 09103,10	ø38
T38	435 - 09101,10	435 - 09103,10	ø38
T38	N/A	435 - 09103 - 18,10	ø52
SR38	427 - 09101,10	427 - 09103,10	ø38
T45	N/A	436 - 09103,10	ø52
T51	N/A	437 - 09103,10	ø52